

# APMI-2.5G-W

Preliminary

## OVERVIEW

APMI-2.5G-W is the InGaAs avalanche photodiode with a low-noise transimpedance amplifier with auto gain control coupled to an optical fiber and packaged into a hermetic case

## MAIN FEATURES

- Operation wavelength 1260 – 1640 nm
- Data rate: 2.5 Gbps
- Sensitivity: -35 dBm
- Package types: coaxial with or without bracket
- Low back reflection, return loss RL = 45 dB

## APPLICATIONS

- Optical fiber communication systems
- LIDARs
- Spectroscopy, fluorescence, biomedical applications

## ORDERING INFORMATION

# APMI-2.5G-W-X-X-10-X-X-X

### Optical matching

**R45:** back reflection -45 dB (SM1 and SM3 fiber)

**R30:** back reflection -30 dB (MM5 fiber)

**RM:** optical matching, +5% larger responsivity

### Case type

**U:** compact coaxial

**B:** compact coaxial with double-sided bracket

### Fiber type

**SMT:** SM, [Corning Titania-Clad](#), furcation tubing  $\varnothing$ 0.9 mm, ultrasmall bending radius 2.5 mm

**SM1:** SM, G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing  $\varnothing$ 0.9 mm

**SM3:** SM, G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing  $\varnothing$ 0.9 mm

**MM5:** MM, [50/125.OM2](#)

Other type: on request

### Connector type

**FA:** FC/APC (SM1, SM3, SMT)

**FU:** FC/UPC (SM1, SM3, SMT, MM5, MM6)

**SA:** SC/APC (SM1)

**SU:** SC/UPC (SM1)

**N:** no connector

Other type: on request

### Fiber length

**0.5:** 500+/-50 mm

**1.0:** 1000+/-100 mm

Other length: on request

# APMI-2.5G-W


## ABSOLUTE MAXIMUM RATINGS

Parameter		Value	Unit	Conditions
TIA supply voltage	$V_{CC}$	4.5	V	
APD supply voltage	$V_{PD}$	$V_{br}$		
Reverse current	$I_r$	2	mA	
Operating temperature	$T_{op}$	-40 ÷ +85	°C	
Storage temperature	$T_{stg}$	-40 ÷ +85	°C	
Soldering temperature	$T_{sold}$	260	°C	Max. 5 seconds

## ELECTRICAL-OPTICAL CHARACTERISTICS (SM FIBER, $\lambda = 1310$ nm, $T = 25$ °C)


Parameter		Min	Typ	Max	Unit	Test conditions
Operation wavelength		1260		1640	nm	
TIA supply voltage	$V_{CC}$	3.0	3.3	3.6	V	
TIA supply current	$I_{CC}$	15	20	24	mA	no loads
Return loss	R30	25	30		dB	
	R45	40	45			
	RM	25	30			
Responsivity	R30, R45	0.80	0.90		A/W	$\lambda = 1310$ nm, $M = 1$ , $P = 1$ $\mu$ W
	RM	0.85	0.95			
Breakdown voltage	$V_{BR}$	35	46	56	V	$I_d = 10$ $\mu$ A
Breakdown voltage temperature coefficient $\Delta V_{BR}/\Delta T$	$\delta$	0.08	0.10	0.12	V/°C	
Dark current	$I_d$		10	50	nA	@ 0.9 Vbr
Bit rate	$B_R$		2.5		Gbps	
Low-frequency cut-off	$f_c$		30		kHz	
Optical sensitivity	$P_{min}$		-35	-33.5	dBm	BER = $10^{-10}$ , BR = 2.5 Gbps, PRBS, ER = 10 dB, $\lambda = 1490$ nm
Output voltage	$V_{out}$		140		mVp-p	
Transimpedance	$Z_t$	5.7	7.7	9.0	k $\Omega$	Differential (50 $\Omega$ on each output), $f = 100$ MHz
Output impedance	$Z_0$		50		$\Omega$	
Saturation power	$P_{sat}$	2			dBm	$\lambda = 1550$ nm @ 2.5 Gbps, NRZ, PRBS

# APMI-2.5G-W

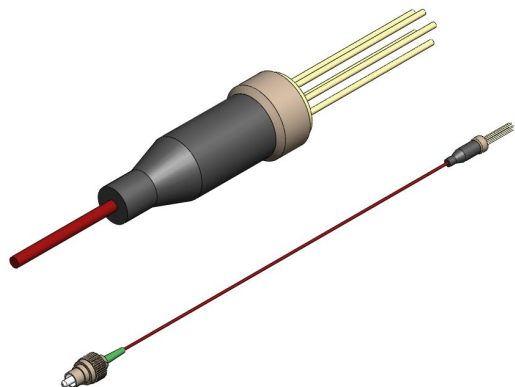

## PACKAGE U


BACK VIEW



PINOUT  
#10


1. Gnd
2. Dout
3. Vcc
4. Vapd
5. Dout

Download more information

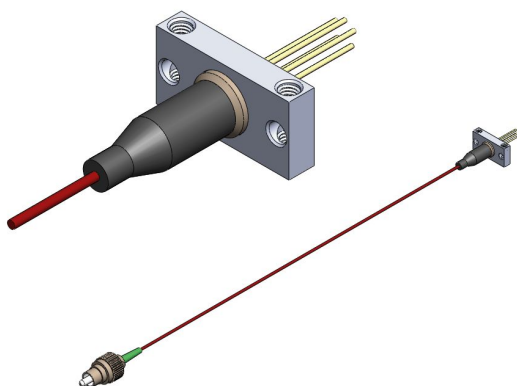

## PACKAGE B


BACK VIEW

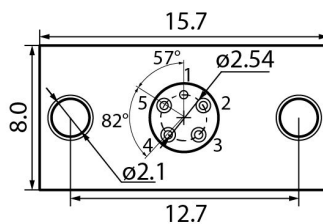

PINOUT  
#10

1. Gnd
2. Dout
3. Vcc
4. Vapd
5. Dout

Download more information



# APMI-2.5G-W

---

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

## **Safety and handling cautions**

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximal ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

## **Conflict Minerals Policy Statement**

LasersCom LLC achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

## **RoHS Compliance Statement**

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LasersCom LLC hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

## **REACH Compliance Statement**

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LasersCom LLC hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LasersCom LLC does not manufacture or import any substances or preparations as defined under REACH.