

APMI-2.5G-W

OVERVIEW

APMI-2.5G-W is the InGaAs avalanche photodiode with a low-noise transimpedance amplifier with auto gain control coupled to an optical fiber and packaged into a hermetic case

MAIN FEATURES

- Operation wavelength 1260 – 1640 nm
- Data rate: 2.5 Gbps
- Sensitivity: -35 dBm
- Package types: coaxial with or without bracket
- Low back reflection, return loss RL = 45 dB

APPLICATIONS

- Optical fiber communication systems
- LIDARs
- Spectroscopy, fluorescence, biomedical applications

ORDERING INFORMATION

APMI-2.5G-W - X - X - 10 - X - X - X

Optical matching

R45: back reflection -45 dB (SM1 and SM3 fiber)

R30: back reflection -30 dB (MM5 fiber)

RM: optical matching, +5% larger responsivity

Case type

U: compact coaxial

B: compact coaxial with double-sided bracket

Fiber type

SMT: SM, [Corning Titania-Clad](#), furcation tubing \varnothing 0.9 mm, ultrasmall bending radius 2.5 mm

SM1: SM, G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing \varnothing 0.9 mm

SM3: SM, G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing \varnothing 0.9 mm

MM5: MM, [50/125. OM2](#)

Other type: on request

Connector type

FA: FC/APC (SM1, SM3, SMT)

FU: FC/UPC (SM1, SM3, SMT, MM5, MM6)

SA: SC/APC (SM1)

SU: SC/UPC (SM1)

N: no connector

Other type: on request

Fiber length

0.5: 500+/-50 mm

1.0: 1000+/-100 mm

Other length: on request

APMI-2.5G-W

ABSOLUTE MAXIMUM RATINGS


Parameter		Value	Unit	Conditions
TIA supply voltage	V_{CC}	4.5	V	
APD supply voltage	V_{PD}	V_{br}		
Reverse current	I_r	2	mA	
Operating temperature	T_{op}	-40 ÷ +85	°C	
Storage temperature	T_{stg}	-40 ÷ +85	°C	
Soldering temperature	T_{sold}	260	°C	Max. 5 seconds

ELECTRICAL-OPTICAL CHARACTERISTICS (SM FIBER, $\lambda = 1310$ nm, $T = 25$ °C)


Parameter		Min	Typ	Max	Unit	Test conditions
Operation wavelength		1260		1640	nm	
TIA supply voltage	V_{CC}	3.0	3.3	3.6	V	
TIA supply current	I_{CC}	15	20	24	mA	no loads
Return loss	R30	RL	25	30	dB	MM5
	R45		40	45		SM1, SM3
	RM		20	25		SM1, SM3, MM5
Responsivity @ $0.95V_{BR}$	R30	R	15		A/W	$\lambda = 1310$ nm, MM5, $V_R = 0.95V_{BR}$
	R45		20			$\lambda = 1310$ nm, SM1, SM3, $V_R = 0.95V_{BR}$
	RM		20			$\lambda = 1310$ nm, SM1, SM3, MM5, $V_R = 0.95V_{BR}$
Breakdown voltage	V_{BR}	35	46	56	V	$I_d = 10 \mu A$
Breakdown voltage temperature coefficient $\Delta V_{BR}/\Delta T$	δ	0.08	0.10	0.12	V/°C	
Dark current	I_d		10	50	nA	@ 0.9 Vbr
Bit rate	B_R		2.5		Gbps	
Low-frequency cut-off	f_c		30		kHz	
Optical sensitivity	P_{min}		-35	-33.5	dBm	BER = 10^{-10} , BR = 2.5 Gbps, PRBS, ER = 10 dB, $\lambda = 1490$ nm
Output voltage	V_{out}		140		mVp-p	
Transimpedance	Z_t	5.7	7.7	9.0	k Ω	Differential (50 Ω on each output), f = 100 MHz
Output impedance	Z_0		50		Ω	
Saturation power	P_{sat}	2			dBm	$\lambda = 1550$ nm @ 2.5 Gbps, NRZ, PRBS

APMI-2.5G-W

CHARACTERISTICS (T = 25 °C)

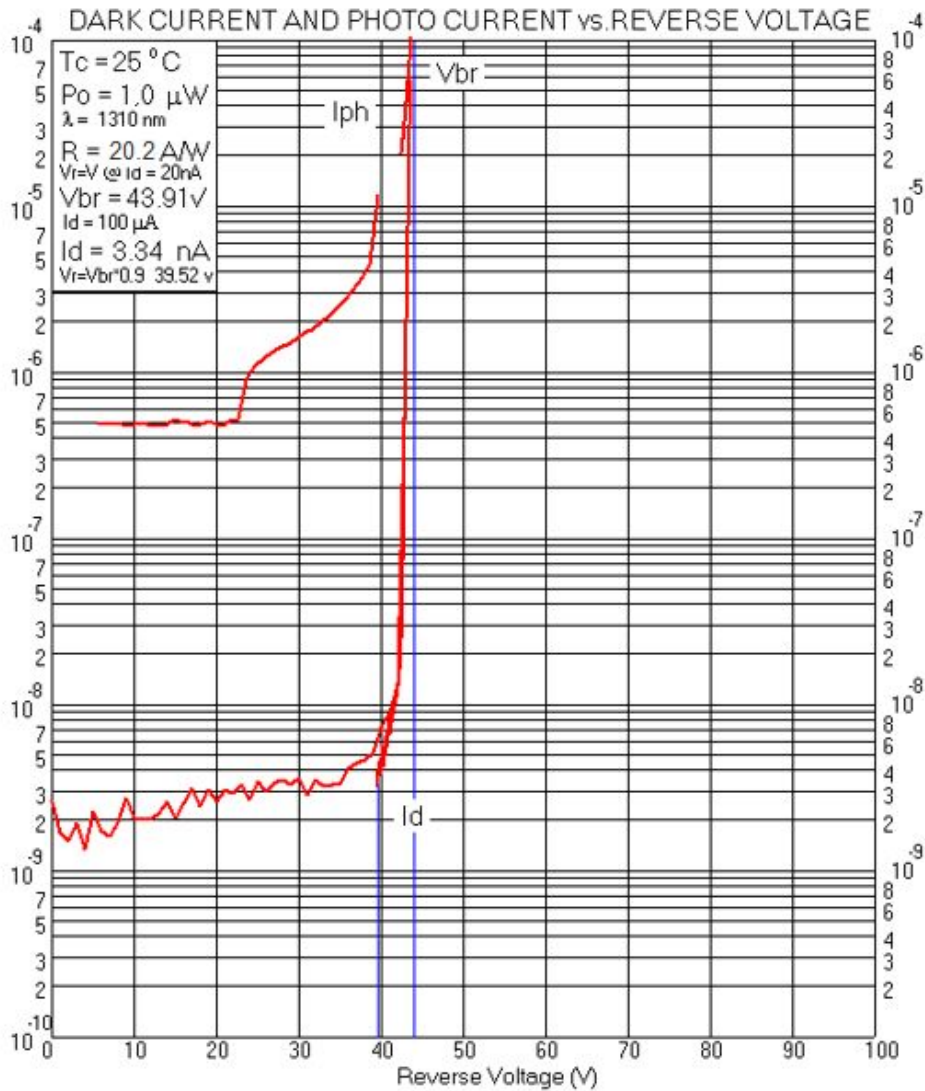


APMI-2.5G-W

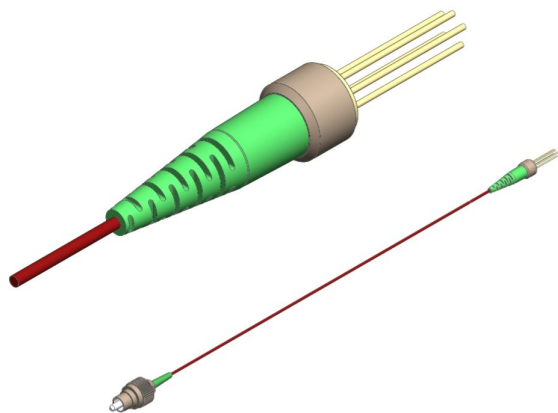

PACKAGE U

BACK VIEW

PINOUT
#10


1. Gnd
2. Dout
3. Vcc
4. Vapd
5. Dout

 Download more
 information

Drawing


3D model

Application Notes

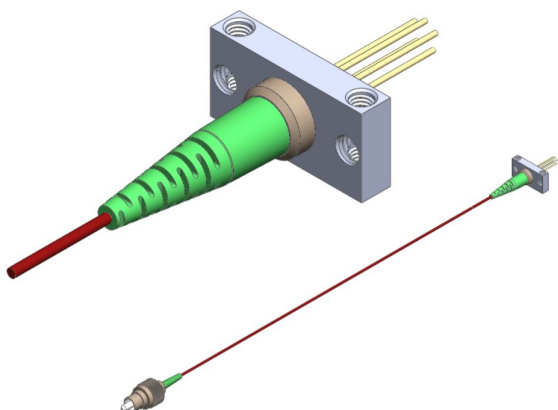

PACKAGE B

BACK VIEW

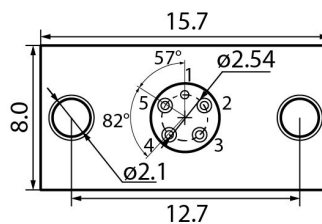PINOUT
#10

1. Gnd
2. Dout
3. Vcc
4. Vapd
5. Dout

 Download more
 information

Drawing

3D model

Application Notes

APMI-2.5G-W

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

Safety and handling cautions

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximal ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

Conflict Minerals Policy Statement

LasersCom LLC achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

RoHS Compliance Statement

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LasersCom LLC hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

REACH Compliance Statement

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LasersCom LLC hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LasersCom LLC does not manufacture or import any substances or preparations as defined under REACH.