

ELED-980-1

OVERVIEW

ELED-980-1 is the edge-emitting superluminescent diode (SLD) coupled to an optical fiber and packaged into a hermetic case

MAIN FEATURES

- Wavelength: 980 nm
- Optical power: up to 1 mW in CW mode in single-mode fiber Corning HI-1060
- Package types: coaxial, compact coaxial with bracket
- Built-in monitor photodiode

APPLICATIONS

- Sensorics
- Optical fiber systems

ORDERING INFORMATION

ELED-980-1-X-3-X-X-X-X

Case type

U9: compat coaxial
B9: compact coaxial with double-sided bracket
 Other type on request

Fiber type

SM05: SM, [Corning HI-780](#), furcation tubing $\varnothing 0.9$ mm
SM06: SM, [Corning Hi-1060](#), furcation tubing $\varnothing 0.9$ mm
SMP06: PM, [Fujikura SM98](#), PANDA type, furcation tubing $\varnothing 0.9$ mm
SM1: SM, G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing $\varnothing 0.9$ mm or **BSM1** $\varnothing 0.25$ mm
SM3: SM, G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing $\varnothing 0.9$ mm or **BSM3** $\varnothing 0.25$ mm
MM5: MM, [50/125. OM2](#), furcation tubing $\varnothing 0.9$ mm
MM6: MM, [62.5/125. OM1](#), furcation tubing $\varnothing 0.9$ mm
 Other type on request

Connector type

FU: FC/UPC (SM05, SM06, SMP06, SM1, SM3, MM5, MM6), not for free-space applications
FA: FC/APC (SM05, SM06, SMP06, SM1, SM3)
N: no connector
 Other type: on request

Test measurements

CW: CW mode (electro-optical parameters at T=25+/-5 C and spectrum)

Fiber length

0.5: 500+/-50 mm
1.0: 1000+/-100 mm
 Other length on request

ELED-980-1





ABSOLUTE MAXIMUM RATINGS

Parameter		Value	Unit	Conditions
SLD forward current	I_{FL}	140	mA	CW
SLD reverse voltage	V_{RL}	2	V	
SLD forward voltage	V_F	2.2	V	
Photodiode reverse voltage	V_{RP}	20	V	
Operating temperature	T_{OP}	-40- +50	°C	Package U, B
Storage temperature	T_{stg}	-40 - +85	°C	
Soldering temperature	T_{sold}	260	°C	Max. 10 seconds

ELECTRICAL-OPTICAL CHARACTERISTICS (T = 25 °C)

Parameter		MIN	TYP	MAX	Unit	Conditions
Wavelength	λ	970	980	990	nm	CW, P = 1 mW
Spectral width	$\Delta\lambda$	20	25		nm	CW, P = 1 mW, FWHM
Spectral modulation			1	4	%	CW, P = 1 mW
Operating current	I_{op}		90	120	mA	CW, P = 1 mW, SM05
Operating voltage	V_{op}		1.6	2.2	V	CW, P = 1 mW
Monitor current	I_m	0.3	0.7	5.0	mA	CW, P = 1 mW, $V_r = 5V$
Polarization extinction ratio	PER	10			dB	CW, SMP06


ELED-980-1

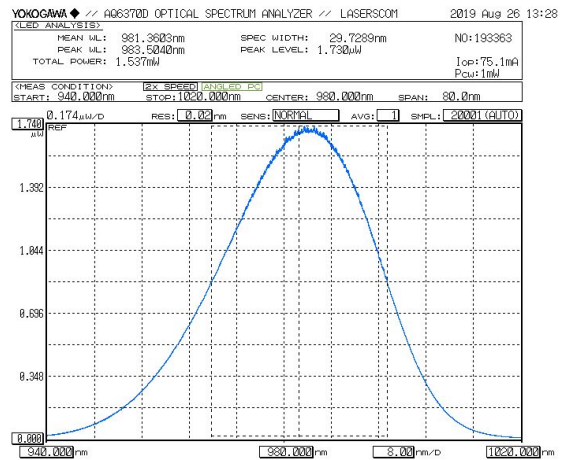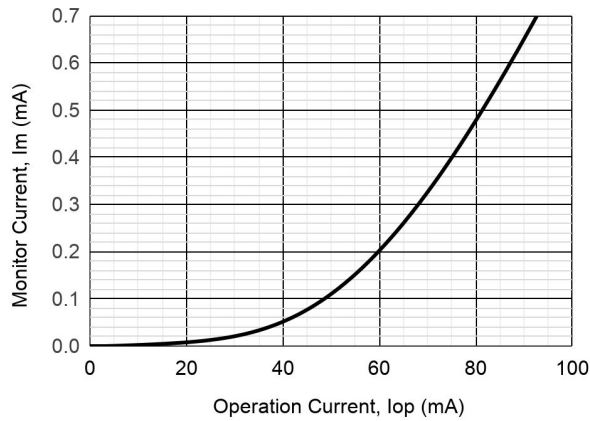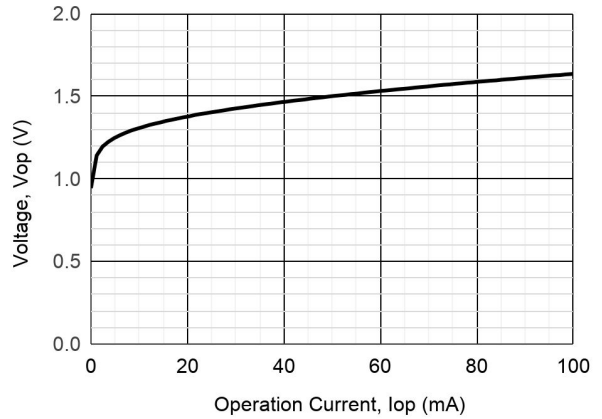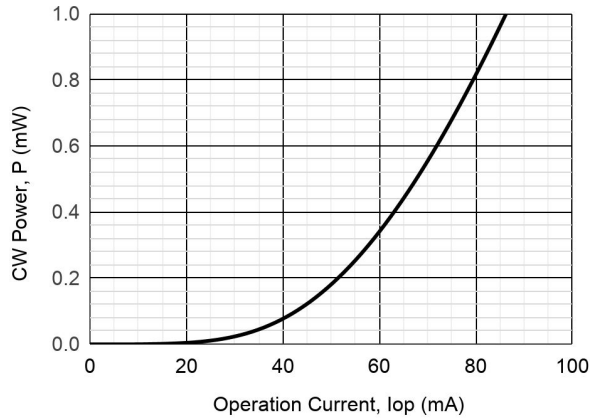


ELED-980-1

PACKAGE U9

SIDE VIEW

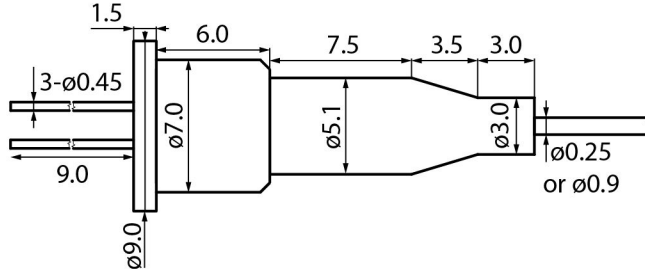


BACK VIEW



PINOUT

#3




Connector FC/UPC, FC/APC, no connector, or by request


Fiber length 500+/-50, 1000+/-100, or by request

PACKAGE B9

SIDE VIEW

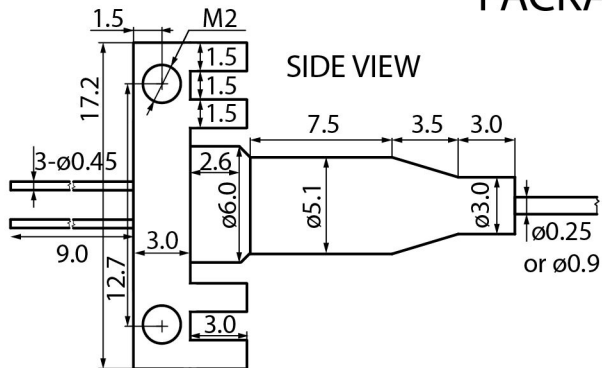


BACK VIEW

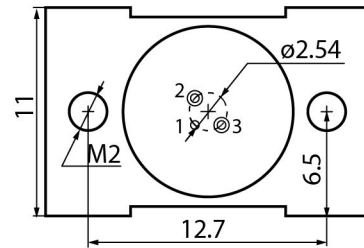

PINOUT

#3



Connector FC/UPC, FC/APC, no connector, or by request

Fiber length 500+/-50, 1000+/-100, or by request

ELED-980-1

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

Safety and handling cautions

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximum ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

Conflict Minerals Policy Statement

LasersCom LLC achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

RoHS Compliance Statement

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LasersCom LLC hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

REACH Compliance Statement

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LasersCom LLC hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LasersCom LLC does not manufacture or import any substances or preparations as defined under REACH.