

# LDI-1310-DFB-25G-15

## Preliminary

### OVERVIEW

LDI-1310-DFB-25G-15 is the high-speed MQW DFB laser diode coupled to an optical fiber and packaged into a hermetic case.

### MAIN FEATURES

- Wavelength: 1310 nm
- Cavity type: DFB
- Data rate up to 25 Gbps
- Optical power: 15 mW in CW mode in SM fiber G.657.A1
- Package types: coaxial, coaxial with bracket
- Built-in monitor photodiode

### APPLICATIONS

- Optical fiber communication systems with data rate up to 25 Gbps
- Laser systems

### ORDERING INFORMATION

## LDI-1310-DFB-25G-15-X-12-X-X-X-X

#### Case type

**U:** compact coaxial (pulse mode only)  
**B:** compact coaxial with double-sided bracket  
 Other type on request

#### Fiber type

**SM1:** SM, G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing Ø0.9 mm or **BSM1** Ø0.25mm  
**SM3:** SM, G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing Ø0.9 mm or **BSM3** Ø0.25mm  
**MM5:** MM, [50/125. OM2](#), furcation tubing Ø0.9 mm  
**MM6:** MM, [62.5/125. OM1](#), furcation tubing Ø0.9 mm  
 Other type on request

#### Connector type

**FA:** FC/APC (SM1, SM3, MM5)      **FU:** FC/UPC (SM1, SM3, MM5, MM6)  
**SA:** SC/APC (SM1)  
**N:** no connector  
 Other type: on request

#### Test measurements

**CW:** CW mode (electro-optical parameters at T=25+/-5 C and spectrum)  
**P:** pulse mode (10 µs; duty cycle = 1%)  
**CWP:** both CW and pulse modes

#### Fiber length

**0.5:** 500+/-50 mm  
**1.0:** 1000+/-100 mm  
 Other length on request

# LDI-1310-DFB-25G-15

## ABSOLUTE MAXIMUM RATINGS






Parameter		Value	Unit	Conditions
Laser diode forward current	$I_{FL}$	105	mA	CW
Laser diode reverse voltage	$V_{RL}$	2	V	
Photodiode reverse voltage	$V_{RP}$	20	V	
Photodiode forward current	$I_{FP}$	2	mA	
Operating temperature	$T_{OP}$	-40 - +85	°C	Package U, B
Storage temperature	$T_{stg}$	-40 - +85	°C	
Soldering temperature	$T_{sold}$	260	°C	max. 5 seconds

## ELECTRICAL-OPTICAL CHARACTERISTICS (T = 25 °C)


Parameter		MIN	TYP	MAX	Unit	Conditions
Wavelength	$\lambda$	1295	1310	1325	nm	CW, I <sub>op</sub> = 100 mA
Spectral width	$\Delta\lambda$		0.12		nm	CW, I <sub>op</sub> = 100 mA, -20 dB, OSA
Spectral width	$\Delta\lambda$		1		MHz	CW, I <sub>op</sub> = 100 mA, delayed self-heterodyne method
Wavelength-temperature coeff.	$d\lambda/dT$		0.12		nm/°C	
Side-mode suppression ratio	SMSR	40	50		dB	CW, I <sub>op</sub> = 100 mA
Threshold current	$I_{th}$		6	10	mA	CW
Optical power (CW)	P <sub>cw</sub>	15			mW	CW, I <sub>op</sub> = 100 mA, SM
Slope efficiency	$S_e$	0.10	0.13		W/A	CW, SM
Operating voltage	$V_{op}$		1.6	2.0	V	CW, I <sub>op</sub> = 100 mA
Tracking error	$E_r$		0.5	1.0	dB	CW, P = 3 mW; T = -40 ÷ +85 °C
Rise and fall times	$t_r, t_f$			25	ps	20%-80%, P <sub>av</sub> = 4 mW
Monitoring output current (PD)	$I_m$	0.1	1.0	5.0	mA	CW, I <sub>op</sub> = 100 mA, V <sub>rd</sub> = 5V
Capacitance (PD)	$C_t$		10		pF	V <sub>rd</sub> = 1 V, f = 1 MHz
Dark current (PD)	$I_d$			100	nA	V <sub>rd</sub> = 1 V

Tracking error  $E_r = \max [10 \lg [P(T)/P(25^\circ\text{C})]]$ ,  $I_m = \text{const}$ ,  $T = T_{\min} \div T_{\max}$

# LDI-1310-DFB-25G-15

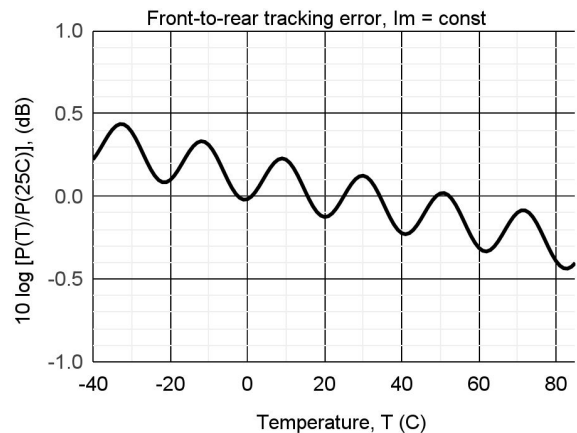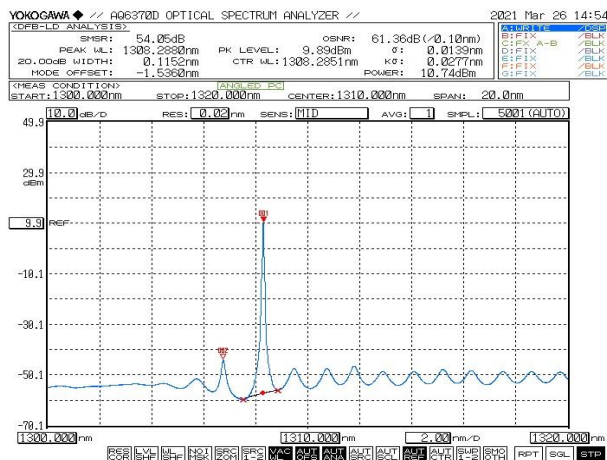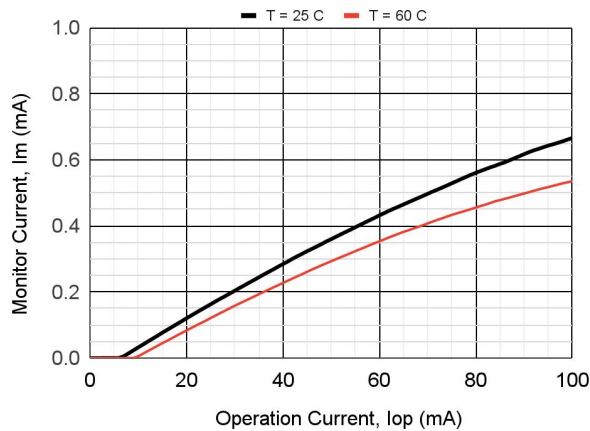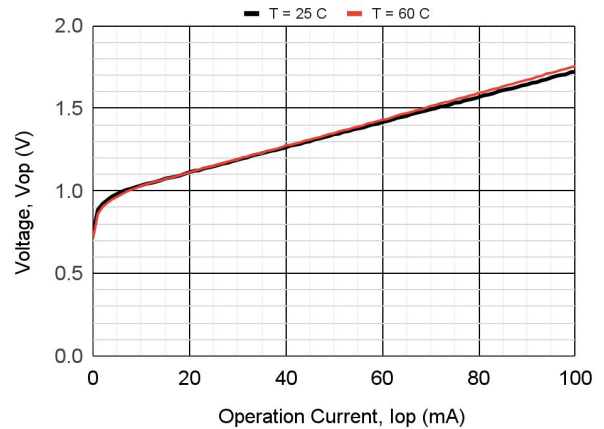
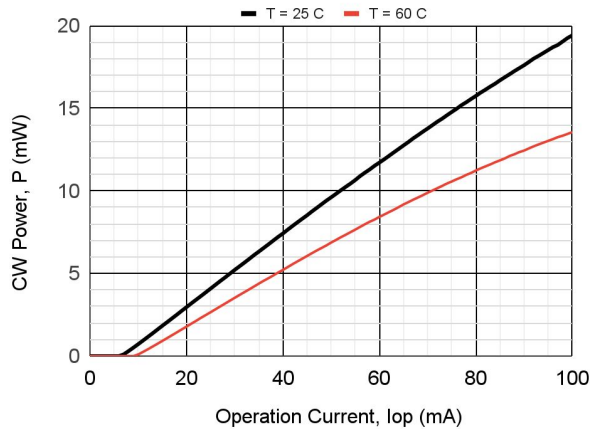


# LDI-1310-DFB-25G-15

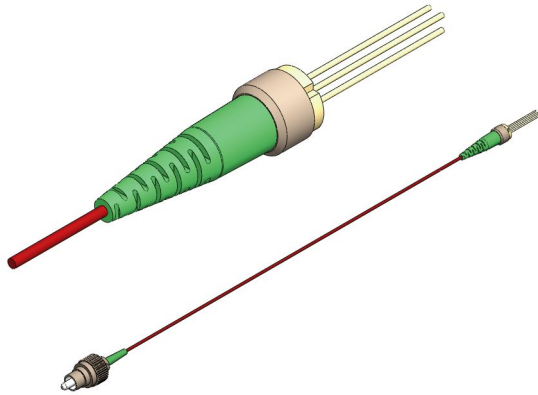

## PACKAGE U

BACK VIEW

PINOUT  
#12Download more  
information


Drawing



3D model





Application Notes

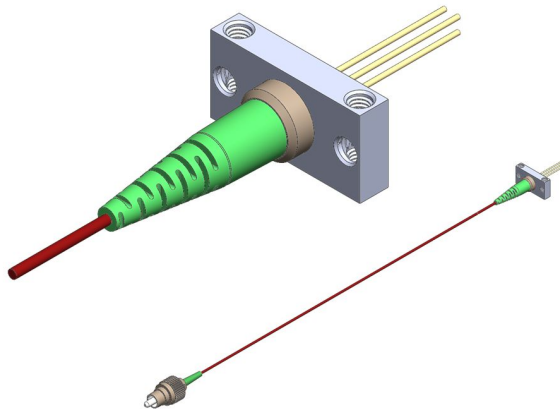

## PACKAGE B

BACK VIEW

PINOUT  
#12Download more  
information

Drawing



3D model



Application Notes

# LDI-1310-DFB-25G-15

---

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

## **Safety and handling cautions**

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximum ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

## **Conflict Minerals Policy Statement**

LasersCom LLC achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

## **RoHS Compliance Statement**

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LasersCom LLC hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

## **REACH Compliance Statement**

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LasersCom LLC hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LasersCom LLC does not manufacture or import any substances or preparations as defined under REACH.