

LDS-880-FP-3

OVERVIEW

LDS-880-FP-3 is the laser diode coupled to an optical fiber and packaged into a hermetic case

MAIN FEATURES

- Wavelength: 880 nm
- Cavity type: Fabry-Perot
- Optical power: 3 mW in CW mode in single-mode fiber Corning HI 780
- Package types: coaxial or coaxial with bracket
- Built-in monitor photodiode

APPLICATIONS

- Spectroscopy
- Biomedicine
- Sensorics

ORDERING INFORMATION

LDS-880-FP-3-X-3-X-X-X-X

Case type

U: compact coaxial
B: compact coaxial with double-sided bracket
 Other type on request

Fiber type

SM05: SM, [Corning HI 780](#), furcation tubing Ø0.9 mm
SMP05: PM, [Fujikura SM85](#), PANDA type, furcation tubing Ø0.9 mm
SM1: G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing Ø0.9 mm
SM3: G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing Ø0.9 mm
MM5: MM, [50/125.OM2](#), furcation tubing Ø0.9 mm
MM6: MM, [62.5/125.OM1](#), furcation tubing Ø0.9 mm
 Other type on request

Connector type

FU: FC/UPC (SM05, SMP05, SM1, SM3, MM5, MM6)
FA: FC/APC (SM05, SMP05, SM1, SM3)
N: no connector
 Other type: on request

Test measurements

CW: CW mode (electro-optical parameters at T=25+/-5 C and spectrum)
P: pulse mode
CWP: both CW and pulse mode

Fiber length


0.5: 500+/-50 mm
1.0: 1000+/-100 mm
 Other length on request

LDS-880-FP-3

ABSOLUTE MAXIMUM RATINGS

Parameter		Value	Unit	Conditions
Laser diode forward current*	I_{max}	22	mA	CW, T = 25°C
Laser diode reverse voltage	V_{RL}	2	V	
Photodiode reverse voltage	V_{RP}	30	V	
Operating temperature**	T_{OP}	-10 - +60	°C	Package B
Storage temperature	T_{stg}	-40 - +85	°C	
Soldering temperature	T_{sold}	260	°C	Max. 5 seconds

*Maximal laser diode forward current depends on the operating temperature. Please, refer to the figure below.

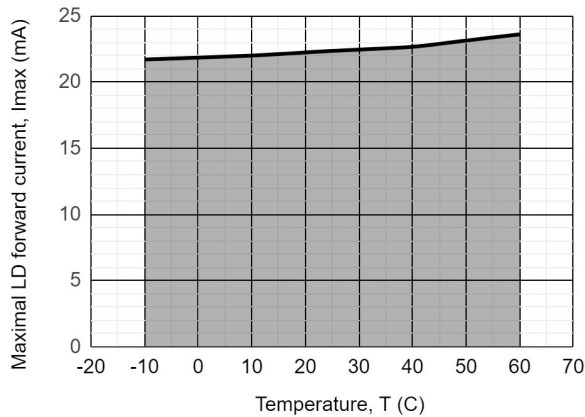

**Operating temperature is defined by the case temperature. It is recommended to ensure sufficient heat dissipation so that the module's maximum operating temperature is not exceeded.






LDS-880-FP-3

ELECTRICAL-OPTICAL CHARACTERISTICS (T = 25 °C)


Parameter		MIN	TYP	MAX	Unit	Conditions
Optical power (CW)	P _{cw}	3			mW	CW, I _{op} = 22 mA, SM05
Mean wavelength	λ	870	880	890	nm	CW, I _{op} = 22 mA
Spectral width	Δλ		1	3	nm	CW, I _{op} = 22 mA
Wavelength-temperature coefficient	dλ/dT		0.27		nm/°C	CW, I _{op} = 22 mA
Threshold current	I _{th}		8	13	mA	
Slope efficiency	S _e	0.21	0.28		mW/mA	CW, SM05
Operating voltage	V _{op}		1.9	2.1	V	CW, I _{op} = 22 mA
Monitor current	I _m	0.1	0.4	0.7	mA	CW, I _{op} = 22 mA, V _r = 5 V
Polarization extinction ratio	PER	17			dB	CW, SMP05
Front-to-rear tracking error	E _r		0.3	0.8	dB	CW, P _{cw} = 3 mW, SM05, T = -10 ~ +50°C

Tracking error E_r = max |10 lg [P(T)/P(25°C)]|, I_m = const, T = T_{min} ~ T_{max}
 Pulse mode: pulse width 10 μs, duty cycle = 1%

LDS-880-FP-3

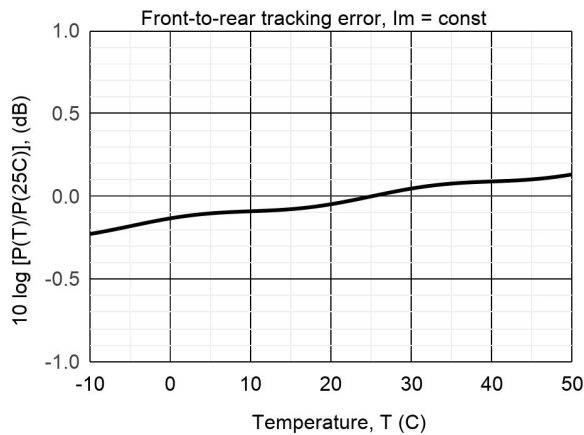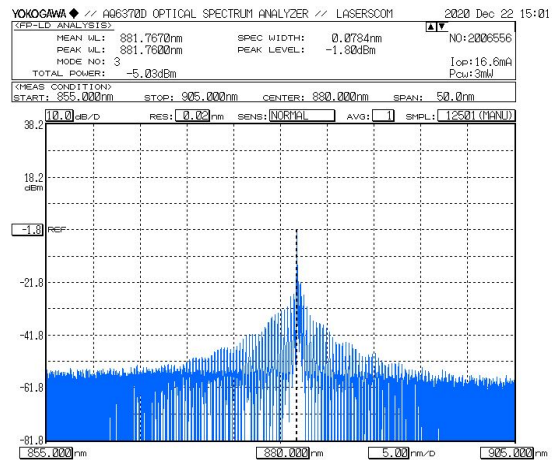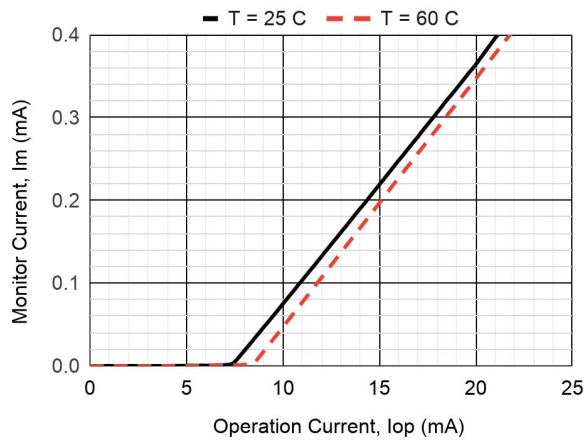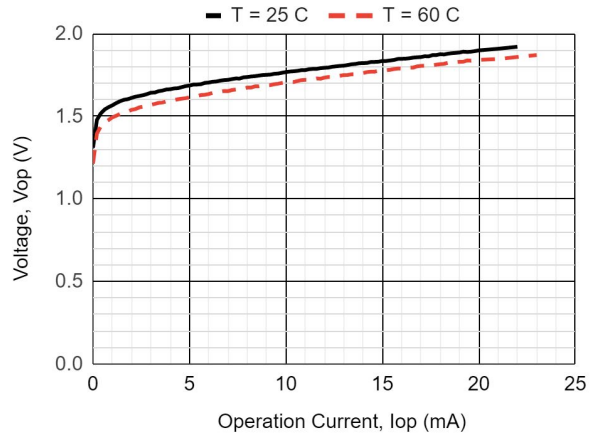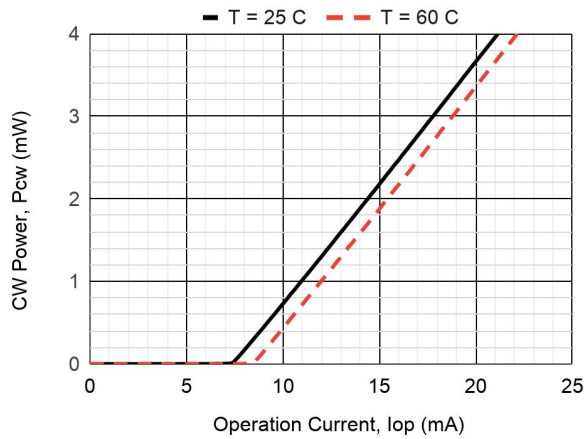


LDS-880-FP-3

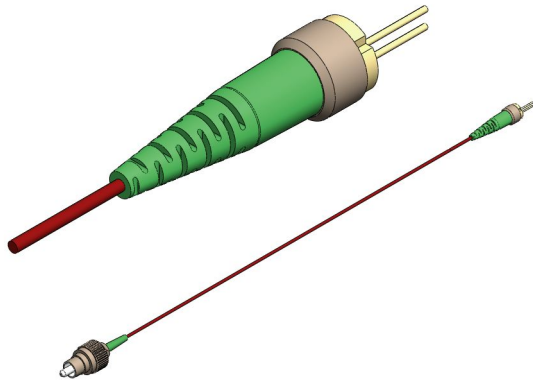


PACKAGE U

BACK VIEW



PINOUT
#3




Download more information

Drawing


3D model

Application Notes

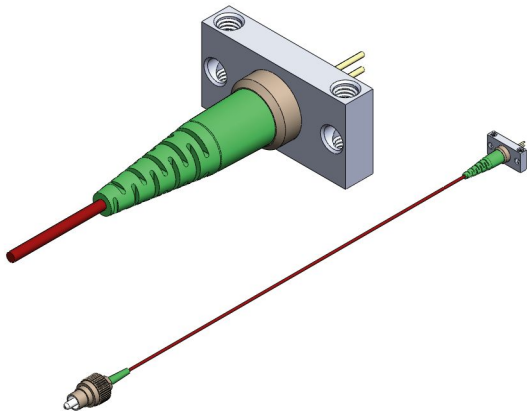


PACKAGE B

BACK VIEW



PINOUT
#3



Download more information

Drawing

3D model

Application Notes

LDS-880-FP-3

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

Safety and handling cautions

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximum ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

Conflict Minerals Policy Statement

LasersCom LLC achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

RoHS Compliance Statement

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LasersCom LLC hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

REACH Compliance Statement

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LasersCom LLC hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LasersCom LLC does not manufacture or import any substances or preparations as defined under REACH.